


ABR[®]

PRODUCTS, INC.

Restoring, beautifying, preserving wood and stone surfaces.

**Ask about our
certification seminars!**

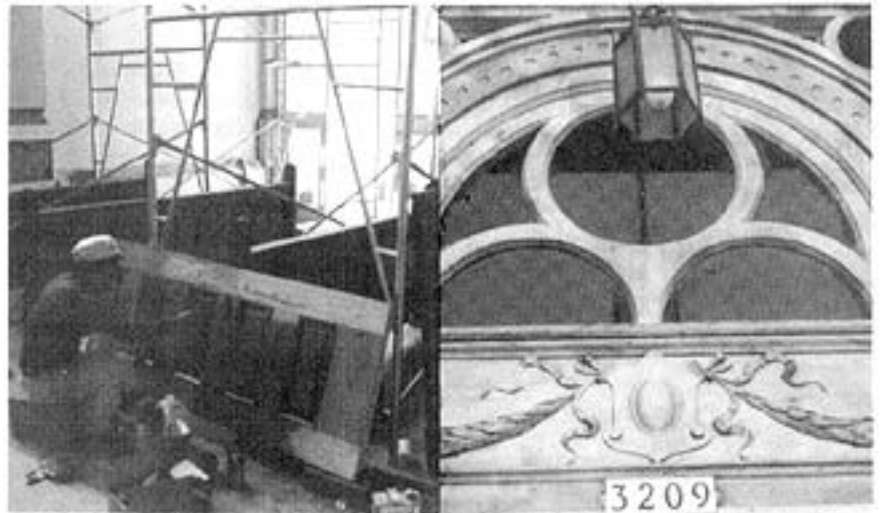

700 SERIES OF SPECIALTY STRIPPERS PRODUCT SPECIFICATIONS

PRODUCT NAME

700XX Extra Strength Special Coating Stripper

700X Special Coating Stripper

MANUFACTURER

American Building Restoration
Products, Inc.
9720 South 60th Street
Franklin, WI 53132
U.S.A.
(414) 421-4125
1-800-346-7532 (Orders Only)
Fax (414) 421-8696
www.abrp.com

PRODUCT DESCRIPTION

Basic Use: 700 series of strippers contain solvents which gives them a broader range of finishes to dissolve. 700 series does not require neutralization after the stripping process.

A high pressure water rinse is not necessarily required, however, it will increase production. **Adequate ventilation is required at all times when working with any of the 700 series specialty strippers.**

700XX Extra Strength Special Coating Stripper

700XX is a methylene chloride based gel designed for certain types of coatings that will not dissolve with a strong caustic stripper. **700XX** works fast to strip elastomeric coatings, epoxies and swimming pool chlorinates.

700X Special Coating Stripper

700X is a gel and contains the highest percentage of methylene chloride. **700X** will not darken wood. Due to its

additives, **700X** will not rapidly dry allowing for extended removability.

Limitations: 700 series of strippers dries out especially in direct sun light, reducing its effectiveness. Optimum working temperature is 55°F to 75°F. Product efficiency is reduced below a temperature of 40°F. The 700 series will not dissolve inorganic cementitious coatings

Precautions: read the entire material safety data sheet and product label for a more thorough evaluation of hazards. Fully protect all adjacent surfaces, especially asphalt, plastic, rubber, tile, linoleum and anodized aluminum as well as general work area. Methylene chloride strippers produce their own gas when activated with air, sunlight, etc.. They have been known to explode in airless paint sprayers and other types of pressure vessels.

TECHNICAL DATA

Color/Form: amber semi paste.

Coverage: 50 sq. ft. per gallon, depending upon surface layers to be removed.

Packaging: one, five and fifty-five gallon containers.

Shelf life: 6 months to one year.

INSTALLATION

A test area should be performed prior to beginning overall project to determine optimum dwell time for the product and the number of applications necessary to completely remove all traces of finish from the surface.

User shall determine the suitability of the product for its intended use and

assumes all risk and liability whatsoever in connection therewith. Follow all local, state, or federal disposal regulations when using this product.

Application:

1. Apply 700 using a natural bristle brush or roller.
2. Apply a thick, uniform coat of 700 to the surface to be stripped.
3. 700 continues to penetrate and dissolve as long as the product remains wet. Note: temperature, air flow, direct sunlight, etc. can evaporate 700. Dab 700 on the dry spots to maintain an even, active application. (This may need to be done several times during the first application).

Note: when stripping floors, cover area with polyethylene sheeting to reduce drying and aid in penetration.

4. Let 700 work until finish is completely loosened. (Dwell time is approximately 25 - 30 minutes).
5. Use a wide blade putty knife to scrape off dissolved finish and a stripper brush to clean out carved or grooved areas.
6. If the finish needs further removal, apply another coat of 700 to the surface. Wait approximately 10 - 15 minutes.
7. 700 should be rinsed immediately after it dissolves the finish. Using #3 coarse steel wool and warm water, surface should be rinsed from the bottom up. Do not use water rinse method on veneer surfaces.
8. Wipe clean with a dry cloth.

AVAILABILITY

Available through a network of distributors, dealers and representatives established in principal cities across the United States, Canada and Japan.

NOTICE: the information and recommendations made herein are based on **ABRP, Inc.**, research and the research of others, and are believed to be accurate. However, no guarantee of their accuracy is made because **ABRP, Inc.**, cannot anticipate every possible application of **ABRP, Inc.**, products, nor anticipate every variation encountered in project surfaces, job conditions, and methods used. For this reason, purchasers shall make their own tests to determine the suitability of such products for a particular purpose. Purchasers assume all risk of use, application and handling of products. Statements concerning the possible use of **ABRP, Inc.**, products are not intended as recommendation to use **ABRP, Inc.**, products in the infringement of any patent.

LIMITED WARRANTY

This warranty is valid for one year from the date of purchase. The purchaser of this product shall be

entitled to the following, if the product herein is shown to be defective: **ABRP, Inc.**, at its option, will either replace the product or refund the purchase price. Contact **ABRP, Inc.**, to make claim under this warranty. The purchaser must have proof of purchase from label and original sales receipt. Proper surface preparation is essential to the applicability of this warranty. Read and follow label directions.

ABRP, Inc., shall not be liable for incidental, consequential or indirect damage arising from the use of this product or the cost of labor involved in its application.

Seller makes no warranty, expressed or implied, concerning the use of this product other than indicated on the label. Buyer assumes all risk of use and/or handling of this material when such use and/or handling is contrary to label instructions.

No other warranties are made, expressed or implied, including without limitation warranties as to MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

This limited warranty may not be mod-

ified or extended by manufacturer's representatives, distributors or dealers of **ABRP, Inc.**, products.

Some states do not allow the exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to the purchaser. This warranty gives the purchaser specific legal rights, as well as, other rights which may vary from state to state.

TECHNICAL SERVICES

ABRP, Inc., employs in field technical representatives to answer questions for architects, building owners and contractors.

REFERENCING

Catalog, product specifications, brochures, list of national registered historical landmarks restored with **ABRP, Inc.**, products and video training tapes are available upon specific request.

ABRP, Inc., is on the WORLD WIDE WEB. For more information on many of the specialty building restoration products available to you, please see our home page at <http://www.abrp.com> or e-mail **ABRP, Inc.** at abrp@execpc.com. **ABRP, Inc.** at abrp@execpc.com.