


ABR[®] PRODUCT SPECIFICATIONS

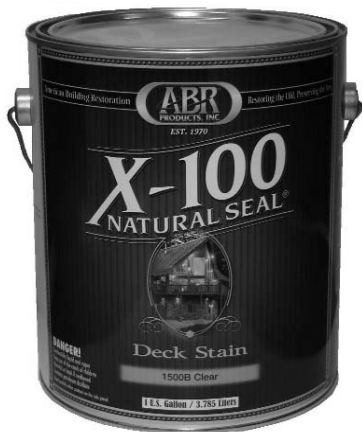

X-100 NATURAL SEAL[®] DECK STAIN[®]

- *Deeper Product Penetration.*
- *Long Lasting Color*
- *Experience developing, manufacturing and supporting a variety of restoration and preservation products since 1970.*

MANUFACTURER

American Building Restoration Products, Inc.
9720 South 60th Street
Franklin, WI 53132 U.S.A.
(414) 421-4125
1-800-346-7532 (Orders Only)
Fax (414) 421-8696
www.abrp.com

PRODUCT DESCRIPTION

Basic Use: X-100 Natural Seal[®] Deck Stain[™] enhance the natural color and texture of your deck, siding, fence or wood trim including cedar, fir, pine, cypress, spruce, redwood and plywood, including T1-11.

X-100 Natural Seal[®] Deck Stain[™] is available in ultra transparent and semi-transparent stains with natural oxides. The ultra transparent technology enables the natural wood grain to show through allowing for a natural wood finish. For optimal color fastness and U.V. wood stabilization apply X-100 Natural Seal[®] Deck Stain[™] under warm and dry conditions.

X-100 Natural Seal[®] Deck Stain[™] is designed to protect wood from the damaging effects of water, Ultra Violet sun light and fungus. X-100 Natural Seal[®] Deck Stain[™] is not designed to prevent wood from accumulating dirt and atmospheric pollutants. See deck maintenance for proper cleaning procedures.

TECHNICAL DATA

Coverage: New, dense or unseasoned wood 300 to 400 sq. ft. per gallon, depending on porosity of surface.

Old, seasoned or weathered wood 200 to 300 sq. ft. per gallon, depending on porosity of surface.

VOC content limit: Less than 250 grams per liter (2.0 lbs. per gallon).

Packaging: One, five and fifty-five gallon containers.

PROPER SURFACE PREPARATION

For best results and optimal penetration: Apply to dry wood. Do not apply if rain is imminently forecasted. Both surface and air temperature must be above 50° F.

IF YOU HAVE NEW WOOD

Step 1-Clean off debris.

Step 2-Apply a coat of X-100 Natural Seal[®] Deck Stain[™].

IF YOU HAVE OLD, DIRTY OR WEATHERED WOOD

Step 1-Clean wood with X-180 Weathered Wood Restorer[™].

Step 2-Apply a coat of X-100 Natural Seal[®] Deck Stain[™].

Note: Applying any X-100 Natural Seal[®] Finish to weathered, grey or dirty wood will further darken the surface.

IF YOU HAVE AN EXISTING COATING (i.e. FAILED FINISH)

Step 1-Strip the previous coating with Super Bio Strip[™].

Step 2-Clean with X-180 Weathered Wood Restorer[™].

Step 3-Apply a coat of X-100 Natural Seal[®] Deck Stain[™].

GENERAL DIRECTIONS

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Mix X-100 Natural Seal[®] Deck Stain[™] well before using. A test area should be performed prior to beginning overall project to determine the amount of X-100 Natural Seal[®] Deck Stain[™] absorption, dry time, wood porosity and total desired look.

1. Apply X-100 Natural Seal[®] Deck Stain[™] with a brush, long handled staining pad or low pressure sprayer. Work vigorously into all surfaces. If using a low pressure sprayer always back brush into surface. Do not allow product to puddle when applying to horizontal surfaces.

2. With a long handled brush, even out distribution by brushing individual shiny areas, puddles, footprints and streaks, brushing against the grain, until entire surface has uniform appearance. It is important to allow time for the wood to absorb X-100 Natural Seal[®] Deck Stain[™].

Caution: Use extreme caution while walking on a horizontal surface during application. Horizontal surfaces can become slippery during and just after product application. Keep a wet edge to avoid lap marks.



Dry time: Allow at least 24 hours to dry. Horizontal surfaces may have different dry times due to wood porosity. Always check horizontal surfaces prior to usage, especially on new decking.

MAINTENANCE

Deck surfaces are worn by ordinary abrasive foot traffic as well as atmospheric pollutants and dirt. Rainwater alone does not wash such deposits away. After a consistent rainfall squeegee horizontal surfaces, (note: on stubborn dirt areas simply utilize a mild dish detergent and water solution with a mild brushing action). Then rinse with water.

Removal of dirt will require routine washing. Unlike sidewalls, horizontal deck surfaces may require washing once in spring and once in fall. X-180 Weathered Wood Restorer™ is recommended. After washing, the wood is conditionally protected but the horizontal surface may require retreatment on an annual basis with a thin maintenance coat of X-100 Natural Seal® Deck Stain™.

Clean up: Use mineral spirits or dish detergent and water. Should X-100 Natural Seal® Deck Stain™ come in contact with surfaces such as glass, paint, metal, caulking or rubber, remove immediately with dish detergent. If a spill is dry, clean it with mineral spirits.

Storage: Keep container closed when not in use. Store in cool place. This product should be kept out of reach of children and stored away from food.

Disposal: Do not reuse empty can. Wrap can and place in trash. Leaking or damaged containers should be placed in a plastic bag and discarded. Contact local, state, or federal agencies to ensure compliance of proper disposal methods and respective regulations.

Helpful hints: When a natural cedar color is desired and for further color fastness use X-100 Natural Seal® Deck Stain™ Cedar Tone Gold. For further protection, apply X-100 Natural Seal® Deck Stain™ on all sides of the wood.

Precautions: Read the entire material safety data sheet and product label for a more thorough evaluation of hazards. Fully protect all adjacent surfaces, as well as, general work area. When spraying near vegetation, cover plant life with cardboard or other suitable material in case of over spray.

Environmental hazards: This product maybe toxic to fish. Do not apply directly to water, to areas where surface water is present or to intertidal areas below the

mean high water mark. Do not contaminate water by disposal of equipment wash waters. Do not use on wood that will be in direct contact with soil.

AVAILABILITY

Available through a network of distributors, dealers and representatives established in principal cities across the United States, Canada, and Japan.

Notice: The information and recommendations made herein are based on ABRP, Inc., research and the research of others, and are believed to be accurate. However, no guarantee of their accuracy is made because ABRP, Inc., cannot anticipate every possible application of ABRP, Inc., products, nor anticipate every variation encountered in project surfaces, job conditions, and methods used. For this reason, purchasers shall make their own tests to determine the suitability of such products for a particular purpose. Purchasers assume all risk of use, application and handling of products. Statements concerning the possible use of ABRP, Inc., products are not intended as recommendation to use ABRP, Inc., products in the infringement of any patent.

LIMITED WARRANTY

This warranty is valid for one year from the date of purchase. The purchaser of this product shall be entitled to the following, if the product herein is shown to be defective: ABRP, Inc., at its option, will either replace the product or refund the purchase price. Contact ABRP, Inc., to make claim under this warranty. The purchaser must have proof of purchase from label and original sales receipt. Proper surface preparation is essential to the applicability of this warranty. Read and follow label directions.

ABRP, Inc., shall not be liable for incidental, consequential or indirect damage arising from the use of this product or the cost of labor involved in its application.

Seller makes no warranty, expressed or implied, concerning the use of this product other than indicated on the label. Buyer assumes all risk of use and/or handling of this material when such use and/or handling is contrary to label instructions.

No other warranties are made, expressed or implied, including without limitation warranties as to MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

This limited warranty may not be modified or extended by manufacturer's representatives, distributors or dealers of ABRP, Inc., products.

Some states do not allow the exclusion or

limitation of incidental or consequential damages so the above limitation or exclusion may not apply to the purchaser. This warranty gives the purchaser specific legal rights, as well as, other rights which may vary from state to state.

TECHNICAL SERVICES

ABRP, Inc., employs a manufacturer-direct personal assistance staff and field technical representatives to answer questions for architects, building owners and contractors.

REFERENCING

Catalog, brochures, list of national registered historical landmarks restored with ABRP, Inc., products and video training tapes, demonstrating a variety of cleaning and restoration projects performed with ABRP, Inc., products, are available upon specific request.

ABRP, INC., is on the WORLD WIDE WEB. For more information on many of the specialty building restoration products available to you, please see our home page at <http://www.abrp.com> or e-mail ABRP, Inc. at abrp@abrp.com.



Look for X-100's New Image
where you purchase ABR
Products